



CALIBRA

Pneumatic seeder for small seeds

The double selection system and the big size of the sowing disc, which **CALIBRA** is equipped, ensure an high sowing precision. Thanks to our special frame and to the skids on the toolbar, it is not necessary to disassemble the machine to set the row distance.

Two turbines work separately to ensure a constant volumetric flow rate and pressure.

CALIBRA is available in the following configurations:

- **SLIM**, for narrow inter-row distances

- **SINGLE LINE**

- **TWIN**, with double sowing line

- **TRIS**, with triple sowing line

- **TANDEM**, with two sowing body

CALIBRA can be supplied with fixed frame and hydraulic folding frame.

STANDARD EQUIPMENT:


Vacuum gauge and pressure gauge; 1 sowing disc per element; Cardan shaft; Covering scrapers; Two turbines; PTO shaft 480 rpm.

OPTIONS:

Row marker; Fertilizer; Microgranulator; Small pressing wheels; Seed suction kit; Front compressing roller; Electronic seeds control.

CALIBRA TWIN

Version 12 rows hydraulic folding frame on three beds, with double microgranulator (option)

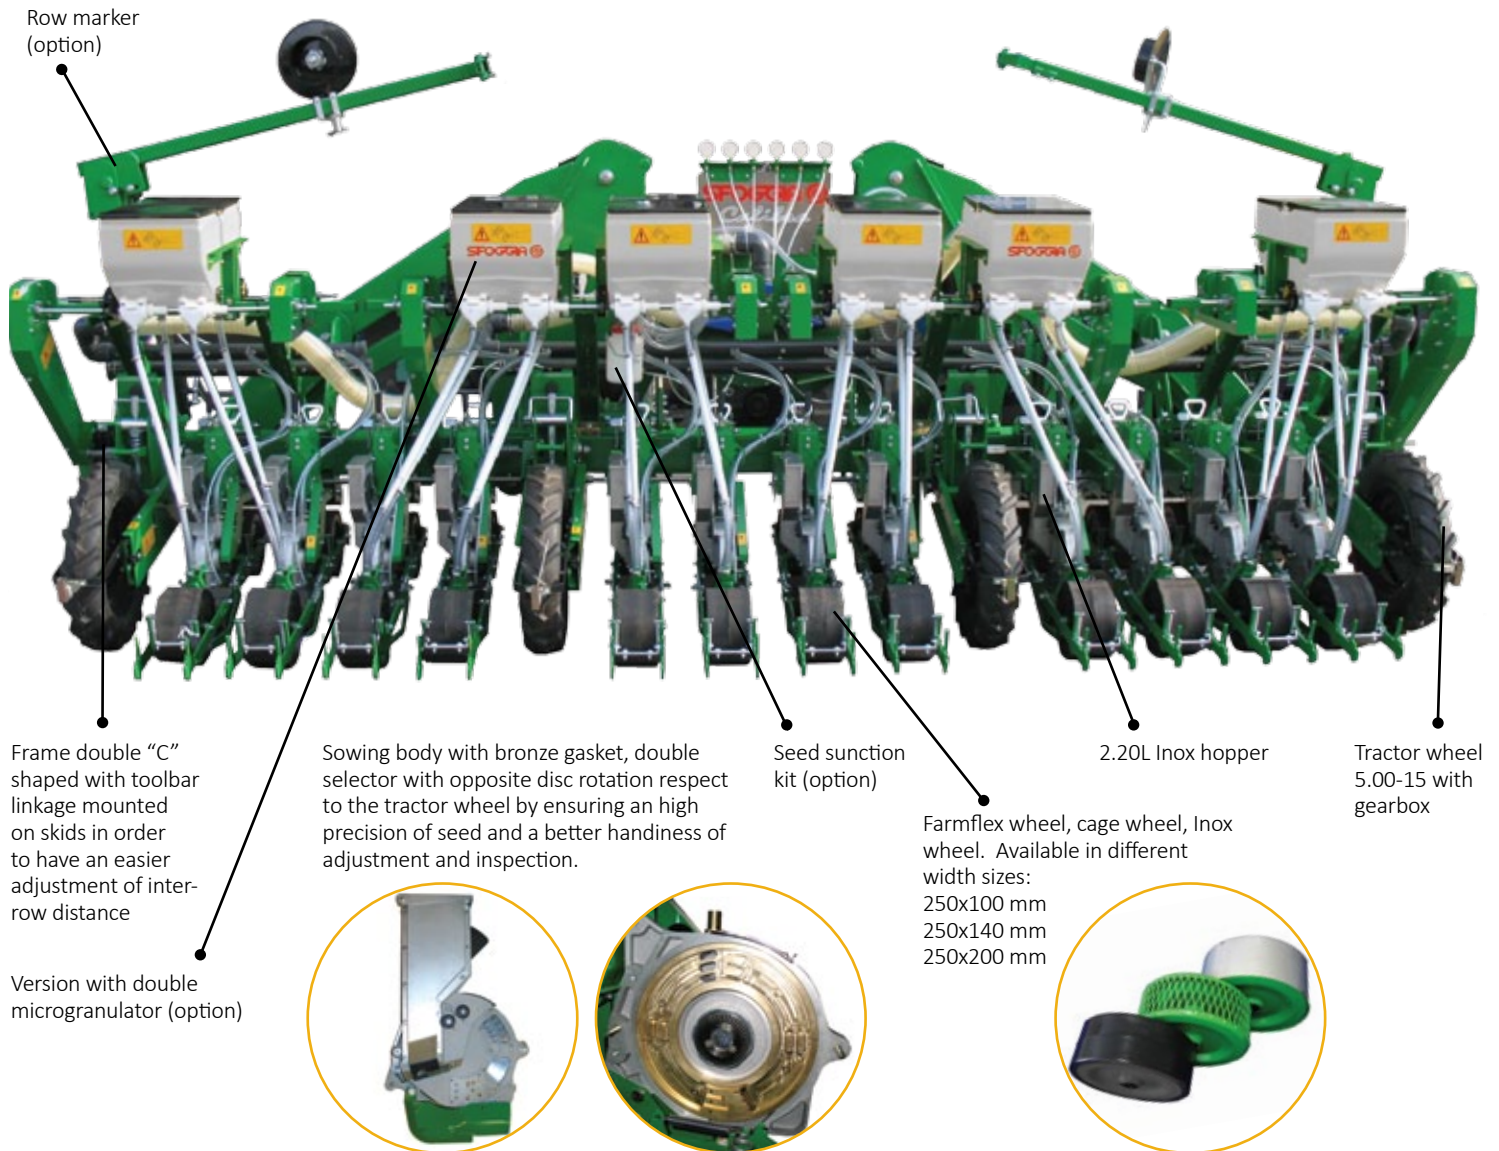

Row marker (option)

Frame double "C" shaped with toolbar linkage mounted on skids in order to have an easier adjustment of inter-row distance

Version with double microgranulator (option)

Sowing body with bronze gasket, double selector with opposite disc rotation respect to the tractor wheel by ensuring an high precision of seed and a better handiness of adjustment and inspection.

Seed suction kit (option)


2.20L Inox hopper

Tractor wheel 5.00-15 with gearbox

Farmflex wheel, cage wheel, Inox wheel. Available in different width sizes:
250x100 mm
250x140 mm
250x200 mm




MODELS AND CONFIGURATIONS

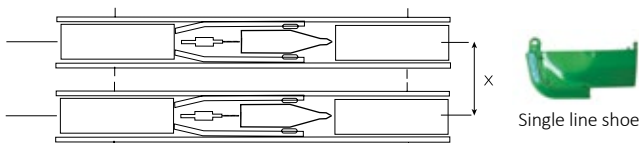

CALIBRA SLIM for narrow inter-row distances
x = 13



Single line shoe

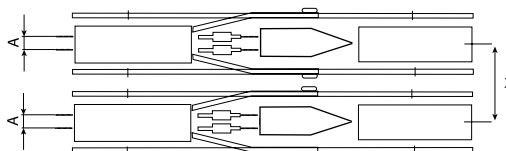


CALIBRA TWIN, with double sowing line
x = 20 for 5, 7, 10 cm version
x = 25.5 for 12 cm version



Shoe for stony soils



Shoe for sandy soils

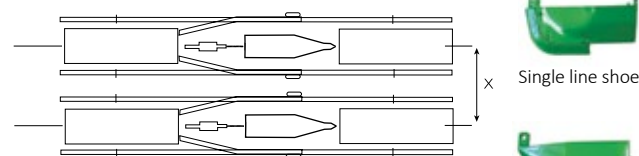


CALIBRA SINGLE LINE
x = 20



Single line shoe



Broadcast shoe

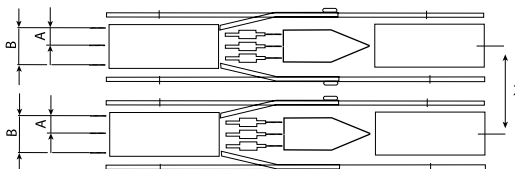


CALIBRA TRIS, with triple sowing line
x = 20 for 3.5+3.5 cm, 5+5 cm version
x = 25.5 for 6+6 cm version



Shoe for stony soils



Shoe for sandy soils

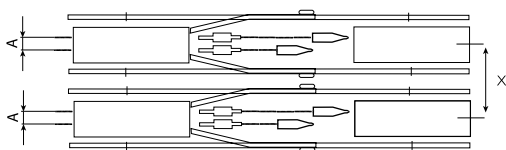


CALIBRA TANDEM
x = 25




Single line shoe

CALIBRA SINGLE LINE

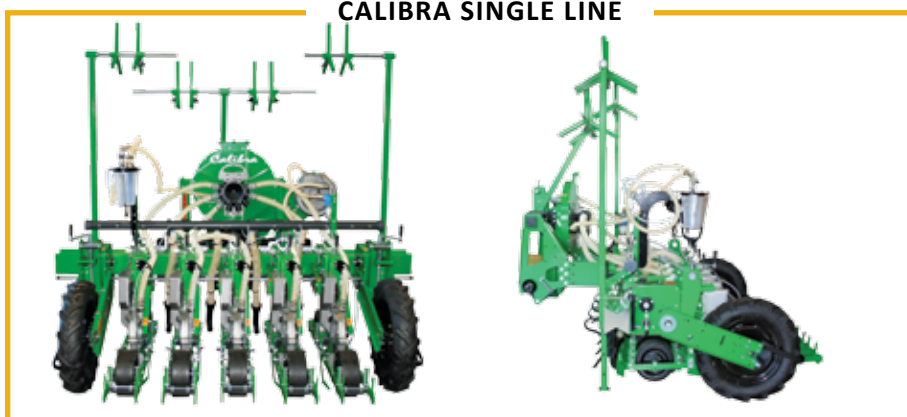

CALIBRA TANDEM

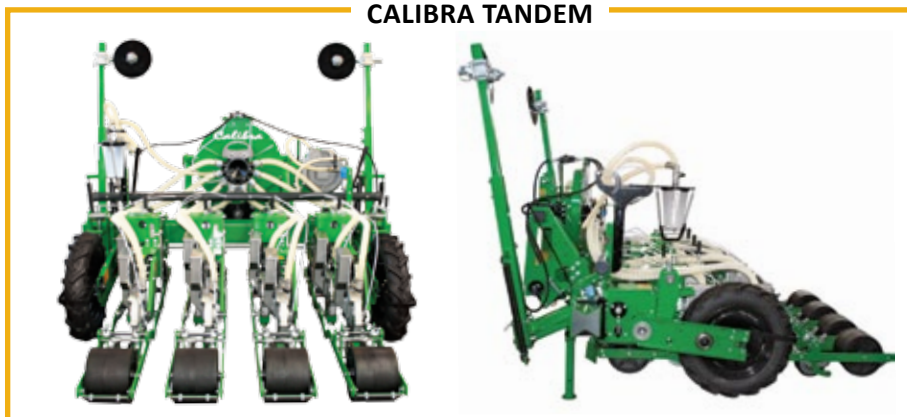

REGULATION DISTANCES OF SENDING		CALIBRA				
15 - 15 - 12 - 16		(32)	(64)	(128)	(128)	(128)
CAMBIO A-B	C-D	C-D	C-D	C-D	C-D	
	10-20	10-20	10-20	15-15	20-10	
		CM	CM	CM	CM	CM
21-16	12,8	6,4	3,2	1,60	0,80	
21-17	13,6	6,8	3,4	1,70	0,85	
21-18	14,4	7,2	3,6	1,80	0,90	
21-19	15,2	7,6	3,8	1,90	0,95	
21-20	16,0	8,0	4,0	2,00	1,00	
21-21	16,8	8,4	4,2	2,10	1,05	
15-16	17,9	8,9	4,5	2,23	1,12	
15-17	19,0	9,5	4,8	2,37	1,19	
15-18	20,1	10,0	5,0	2,51	1,26	
15-19	21,2	10,6	5,3	2,65	1,33	
15-20	22,3	11,2	5,6	2,79	1,40	
15-21	23,4	11,7	5,9	2,93	1,47	

REGULATION DISTANCES OF SENDING		CALIBRA				
15 - 15 - 12 - 16		(26)	(52)	(104)	(104)	(104)
CAMBIO A-B	C-D	C-D	C-D	C-D	C-D	
	10-20	10-20	10-20	15-15	20-10	
		CM	CM	CM	CM	CM
21-16	15,7	7,9	3,9	1,96	0,98	
21-17	16,7	8,4	4,2	2,09	1,04	
21-18	17,7	8,9	4,4	2,21	1,10	
21-19	18,7	9,3	4,6	2,33	1,17	
21-20	19,6	9,8	4,9	2,45	1,23	
21-21	20,6	10,3	5,2	2,58	1,29	
15-16	22,0	11,0	5,5	2,75	1,37	
15-17	23,4	11,7	5,8	2,92	1,46	
15-18	24,7	12,4	6,2	3,09	1,55	
15-19	26,10	13,0	6,5	3,27	1,63	
15-20	27,5	13,7	6,8	3,44	1,72	
15-21	28,9	14,4	7,2	3,61	1,80	

REGULATION DISTANCES OF SENDING		CALIBRA TANDEM				
15 - 15 - 12 - 16		(20)	(52)	(104)	(104)	(104)
CAMBIO A-B	C-D	C-D	C-D	C-D	C-D	
	10-32	10-32	10-32	17-25	25-17	
		CM	CM	CM	CM	CM
21 16	21,31	8,20	4,10	1,88	0,87	
21 17	22,65	8,71	4,35	2,00	0,93	
21 18	23,98	9,22	4,61	2,12	0,98	
21 19	25,31	9,73	4,87	2,24	1,03	
21 20	26,64	10,25	5,12	2,35	1,09	
21 21	27,97	10,76	5,38	2,47	1,14	
15 16	29,84	11,48	5,74	2,64	1,22	
15 17	31,70	12,19	6,10	2,80	1,30	
15 18	33,57	12,91	6,46	2,97	1,37	
15 19	35,43	13,63	6,81	3,13	1,45	
15 20	37,30	14,35	7,17	3,30	1,52	
15 21	39,16	15,06	7,53	3,46	1,60	



Technical data e models shown in this catalogue are not binding. SFOGGIA reserves the right to revise the contents of this brochure, to amend or improve the specifications without notice.