

## **TECHNICAL SPECIFICATIONS**

- 1 Trolleys entry.
- 2 Trolleys positioner with 2250 mm stroke.
- 3 Double pneumatic block of the trolleys.
- 4 Accumulation belt.
- **5** Elevator belt with electromechanical pusher for single rows.
- **6** Trolleys exit.
- **7** Fencing safety guards with access doors.
- It stores up to 99 programs.
- Available in right and left solutions.

## **ACCESSORIES**


- Possibility to work with **non-standard trolleys**.
- Electromechanical **pusher** to load **more than one row** of trays **on the same shelf**.
- Trolleys' advancement with chain for the frame.

## MACHINE DESCRIPTION

The CARICATORECC trolley loader is a machine for the automatic loading of the trays on the trolleys'shelves.

TECHNICAL DATA	M.U.	CARICATORECC
HOURLY PRODUCTION	cycle/hour (*)	250
TROLLEY DIMENSIONS (standard)	mm	1350x656x2250
TROLLEY HEIGHT (max)	mm	2855
INSTALLED POWER	kW	4
AIR CONSUMPTION (max)	l/min	20
WEIGHT (standard)	kg	1300
(*) each CVCI E corresponds to the complete positioning of the trave on one of the tralley's shalves		

\*) each CYCLE corresponds to the complete positioning of the trays on one of the trolley's shelves.

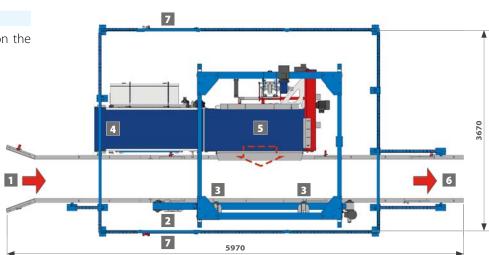



Empty trolleys **entry**.



Trolleys **exit**.



Pots **loading phase** on the trolley shelves.



Trolley in the **frame version** with advancement system with chain.

